


TranSport
MOBILE BLEACHERS



TEN - ROW
SPECTATOR SEATING

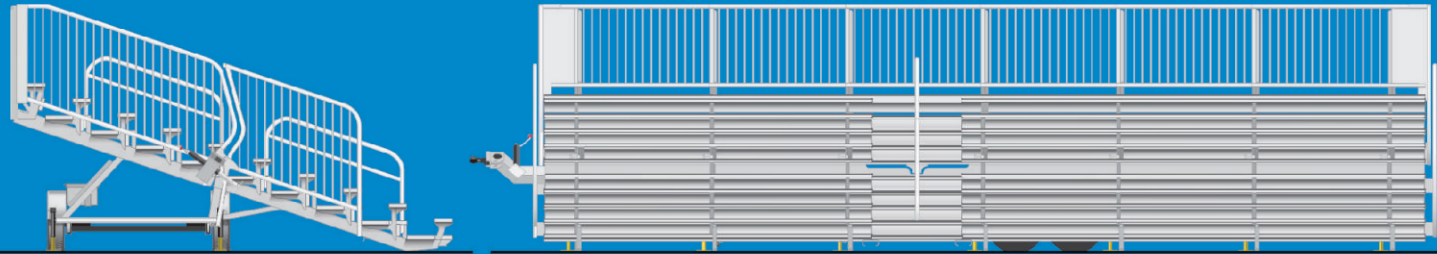

TSP10

STANDARD FEATURES

TSP10 model mobile bleachers provide you with outdoor mobile ten-row spectator seating that can be quickly and easily relocated throughout your community on public roads. **TSP10** bleachers offer a compact design with reduced weight for easy towing and a high degree of maneuverability allowing positioning in confined locations. Reduced weight permits the use of smaller tow vehicles while reducing site impact and permitting operation on softer ground surfaces.

TSP10 mobile bleachers feature push-button opening and closing for fast, effortless, one-person set up.

TSP10 mobile bleachers are built from weather resistant materials to withstand outdoor use.

Overview

- 10 Rows high
- 24" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- One person push-button setup
- Self-Stowing over-center design
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- IBC2018 code compliance standard
- Delivered fully assembled, ready for use

Seat & Footboards

- Full length without gaps
- Extruded aluminum seat and foot planks
- Extra-width one-piece footboards
- IBC riser enclosures - standard

Guardrails

- Aluminum construction
- Rounded guardrails for comfort
- Attached to bleacher structure for automatic set up and positioning

Leveling/Support

- Multiple frame mounted support jacks permit bleacher operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel for unlevel or uneven terrain.
- Built-in frame-mounted anchoring lugs

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.
- Actuator does not penetrate main frame

Transport

- Hitch – choice of pintle, 2 5/16" ball coupler, or 2" (50mm) ball coupler
- Retractable hitch
- Electric brakes
- Highway rated tires
- Rugged rubber torsion suspension accommodates curbs and off-road towing
- Fenders
- LED DOT marker and signal lights

Weather Resistance

- Steel components plated or hot-dip galvanized after fabrication
- Anodized aluminum seatplanks

Optional Features

- ADA provisions
- Enclosed storage compartment
- Solar battery charger
- Spare tire

SPECIFICATIONS

Setup	TSP10 27	TSP10 39	TSP10 45
Seat Rows	10	10	10
Capacity (with Aisle)	156	236	276
Seat Length	27'- 0" (8.23m)	39'- 0" (11.89m)	45'- 0" (13.72m)
Overall Length	28'- 0" (8.53m)	40'- 0" (12.19m)	46'- 0" (14.02m)
Overall Depth	19'- 6" (5.95m)	19'- 6" (5.95m)	19'- 6" (5.95m)
Overall Height	10'- 11" (3.33m)	10'- 11" (3.33m)	10'- 11" (3.33m)
Top Row	7'- 5" (2.26m)	7'- 5" (2.26m)	7'- 5" (2.26m)

Towing

Axles	1	2	2
Coupler	Choice of Ball or Pintle		
Length	33'- 7" (10.23m)	45'- 7" (13.89m)	51'- 7" (15.72m)
Width	8'- 1" (2.47m)	8'- 1" (2.47m)	8'- 1" (2.47m)
Height	13'- 1" (3.98m)	13'- 1" (3.98m)	13'- 1" (3.98m)
Tow Weight	6300 lbs (2858 kg)	8300 lbs (3765 kg)	10500 lbs (4763 kg)

Compliance

IBC 2018
DOT

Specifications subject to change without notice.